



PAHU 8 / 12 / 16

120V PENDANTS

location:
DAMP

SPECIFICATIONS:

DESCRIPTION

Cable-hung or stem-mount pendant with handcrafted glass diffuser. Available in three sizes with additional options of no inner glass.

LAMPING

Standard: A19 120V incandescent, lamp not included. Dimmable with standard incandescent dimmer (not included).

CFL: 4-Pin CFL with non-dimming electronic ballast. 120V, lamp not included.

GU24 CFL: Self-ballasted GU24 lampholders. 120V, lamp not included.

LED: 11W Replaceable source, 120V, dimmable, 80+ CRI, 3000°K CCT, 1100 lumens, 30,000 hours. Lamp included.

DIFFUSER

Inner shade shall be handcrafted Opal glass.

Outer shade shall be handcrafted glass of various decors.

Pahu 8 #X00607: 7.875" Dia. x 9.875" H

Pahu 12 #X18407: 11.75" Dia. x 10.625" H

Pahu 16 #X00707: 15.75" Dia. x 11.75" H

Opening sizes: 3x7mm holes.

SUSPENSION

Cable-hung: 3x 10' aircraft-quality stainless steel cable support with 10' AWM-type cord. Jacket tint coordinates with metal finish. 5" Dia. canopy is plated stamped steel. Bronze or Satin Nickel.

Stem-mount: 4 connectable stem sections (3", 6", 12" and 18" lengths) plus telescoping piece for up to 3" adjustment, 10' max. 5" Dia. canopy (with swivel) and stem sections are plated steel. Bronze or Satin Nickel.

MOUNTING

Installs directly to a 4" octagonal ceiling box. Suitable for sloped ceilings.

LABELS

UL or ETL Listed. Suitable for Damp Locations (interior use only).

Consult factory concerning lower wattage labeling for energy requirements.



PAHU 16 SHOWN IN CLEAR WITH NO INNER GLASS (C00707-NI) & PAHU 12 SHOWN IN TRANS. ARMAGNAC/OPAL (A18407) IN STEM OPTION



For ordering information, see next page


All dimensions provided are nominal.
Allowance must be made for dimensional tolerance in handcrafted glasses.

REV 1/17



ORDERING:


Pahu 8:

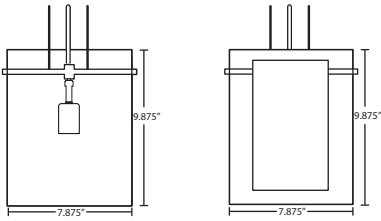

(No Inner Glass)

CONNECTION -	SHADE OPTIONS	LAMP OPTIONS	METAL FINISH -	OPTIONS
3x Cable Fixture	A00607 Trans. Amethyst/Opal	(blank) 100W A19 Incan	BR Bronze	L 15' cord
1KG 1 Lt. Flat	C00607 Clear/Opal	F1 18W TBX 120V	SN Satin Nickel	NI No Inner glass
Stem Fixture	G00607 Trans. Armagnac/Opal	O1 18W TBX 277V		LW Low wattage labeling
1TT 1 Lt. Flat	L00607 Trans. Olive/Opal	EDI 40W Edison (For NI option)		
	S00607 Trans. Smoke/Opal	EDIL 5W LED Filament (For NI option)		
		GU24 18W GU24 120V		
		LED 11W LED 120V, dimmable		


Pahu 12:

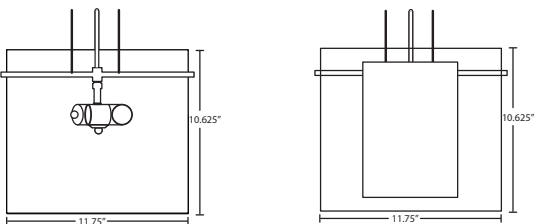

(No Inner Glass)

CONNECTION -	SHADE OPTIONS	LAMP OPTIONS	METAL FINISH -	OPTIONS
3x Cable Fixture	A18407 Trans. Amethyst/Opal	(blank) 100W A19 Incan	BR Bronze	L 15' cord
1KG 1 Lt. Flat	C18407 Clear/Opal	I1 26W TBX 120V	SN Satin Nickel	NI No Inner glass, 3 Lt.
Stem Fixture	G18407 Trans. Armagnac/Opal	R1 26W TBX 277V		LW Low wattage labeling
1TT 1 Lt. Flat	L18407 Trans. Olive/Opal	EDI 40W Edison (For NI option)		
	S18407 Trans. Smoke/Opal	EDIL 5W LED Filament (For NI option)		
		GU24 18W GU24 120V		
		LED 11W LED 120V, dimmable		

Pahu 16:

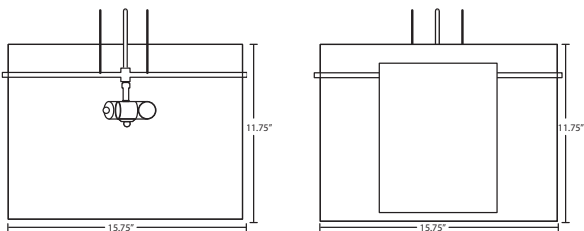


(No Inner Glass)

CONNECTION -	SHADE OPTIONS	LAMP OPTIONS	METAL FINISH -	OPTIONS
3x Cable Fixture	A00707 Trans. Amethyst/Opal	(blank) 150W A21 Incan	BR Bronze	L 15' cord
1KG 1 Lt. Flat	C00707 Clear/Opal	I1 26W TBX 120V	SN Satin Nickel	NI No Inner glass, 3 Lt.
Stem Fixture	G00707 Trans. Armagnac/Opal	R1 26W TBX 277V		LW Low wattage labeling
1TT 1 Lt. Flat	L00707 Trans. Olive/Opal	EDI 40W Edison (For NI option)		
	S00707 Trans. Smoke/Opal	EDIL 5W LED Filament (For NI option)		
		GU24 18W GU24 120V		
		LED 11W LED 120V, dimmable		


PENDANT OPTIONS:

CABLE-HUNG PENDANT



- 3x 10' aircraft-quality stainless steel cable
- 1KG Series: 1x lampholder
- Cord: 10' AWM-type provided
- Bronze or Satin Nickel

STEM PENDANT



- Swivel at canopy, suitable for sloped ceilings
- Includes telescoping section plus 4 connectable stem sections, (1x 3", 1x 6", 1x 12", 1x 18"), 10' max
- Bronze or Satin Nickel

ACCESSORIES:

ADDITIONAL STEM SECTIONS:

Additional connecting stems are available to increase overall length, up to 10' max. Telescoping adjustable section allows up to 3" movement.

- T20A-SN** or **T20A-BR** Adj. Section
- T203-SN** or **T203-BR** 3" Section
- T206-SN** or **T206-BR** 6" Section
- T212-SN** or **T212-BR** 12" Section
- T218-SN** or **T218-BR** 18" Section

Project Information:

